

2/4-Port USB 3.0 4K DisplayPort MST KVMP™ Switch

CS1922M / CS1924M

Incorporating the latest Multi-Stream Transport (MST) technology, the CS1922M / CS1924M 2/4-Port USB 3.0 4K DisplayPort MST KVMP™ Switch is the world's first DisplayPort KVM switch with a built-in MST hub. The CS1922M / CS1924M enables users to adopt two console displays from a single DisplayPort 1.2 video source, providing an extended desktop mode and splitter mode at resolutions up to 4K for multitasking across two displays while reducing bulky cable connections.

To meet the ever-increasing demand for high-speed peripheral data transmissions, the CS1922M / CS1924M integrates a USB 3.1 Gen 1 hub to deliver unprecedented data transfer rates up to 5 Gbps – allowing you to maximize multitasking operations.

The unique independent switching feature allows the KVM switch's focus to be on one computer while its USB peripheral focus is on another computer. This eliminates the need to purchase a separate USB hub or stand-alone peripheral sharer – such as a print server or splitter. Additionally, the switch allows you to share the audio from each of the connected computers and even allows HD audio transmitted through a DisplayPort source.

With a rich feature set, the CS1922M / CS1924M is designed to exceed the requirements such as excellent video quality and ultra-fast data transmission speed for gaming, graphic design, animation, and video-editing applications.



CS1922M Front View



CS1922M Rear View



CS1924M Front View



CS1924M Rear View



Features

World's First DisplayPort KVM Switch with Built-in MST Hub

- One USB keyboard / mouse and DisplayPort or HDMI monitor control 2/4 computers and 2 USB peripherals
- Built-in Multi-Stream Transport (MST) hub allows dual displays (DisplayPort / HDMI) from a single DisplayPort source¹
- Supports MST Mode, Splitter Mode, and Single Port Mode.
- 2-port USB 3.1 Gen 1 hub with SuperSpeed 5 Gbps data transfer speeds
- DisplayPort Dual-Mode (DP++) technology supports HDMI and DVI signals via a DisplayPort-to-HDMI/DVI DP++ adapter²
- Firmware upgradeable
- Hot pluggable – add or remove computers without powering down the switch

Remarkable Audio / Video Experience

- Superior video quality – 4K UHD (3840 x 2160 @ 60 Hz) and 4K DCI (4096 x 2160 @ 60 Hz)
- DisplayPort 1.2 compliant, HDCP 1.3 compliant³
- Supports HD audio through DisplayPort⁴
- Full bass response for high-quality 2.1 channel surround sound systems

Intelligent Operation


- Computer selection via front panel pushbuttons, hotkeys, mouse⁵, and RS-232 commands
- Independent switching of KVM, USB hub, and Audio focus
- Power On Detection – if a computer is powered off, the CS1922M / CS1924M automatically switches to the next powered-on computer
- Auto Scan Mode for monitoring all computers

Versatile Compatibility

- Keyboard emulation / bypass feature supports most gaming keyboards
- Mouse emulation / bypass feature supports most mouse drivers and multifunction mice
- Multi-platform support – Windows, Mac and Linux
- Multilingual keyboard mapping supports English, Japanese, French and German keyboards

Note:

1. MST (Multi-Stream Transport) requires either monitors that are capable of DisplayPort 1.2 daisy-chaining, or use of a powered DisplayPort MST Hub. A DisplayPort v1.1a display can be the last display in a DisplayPort v1.2 chain. The PC source must be DisplayPort 1.2 compliant.
2. DisplayPort Dual-Mode technology (DP++) does not require an active adapter for most single display setups. Active DisplayPort adapters are recommended if you are unsure of the video source's DP++ compatibility.
3. For DisplayPort 1.4 compliant display device, make sure to configure the device setting to be compatible with DisplayPort 1.2 to avoid compatibility issue.
4. HD audio through DisplayPort cannot be switched independently.
5. Mouse port switching is only supported under mouse emulation mode with a USB 3-button mouse wheel.

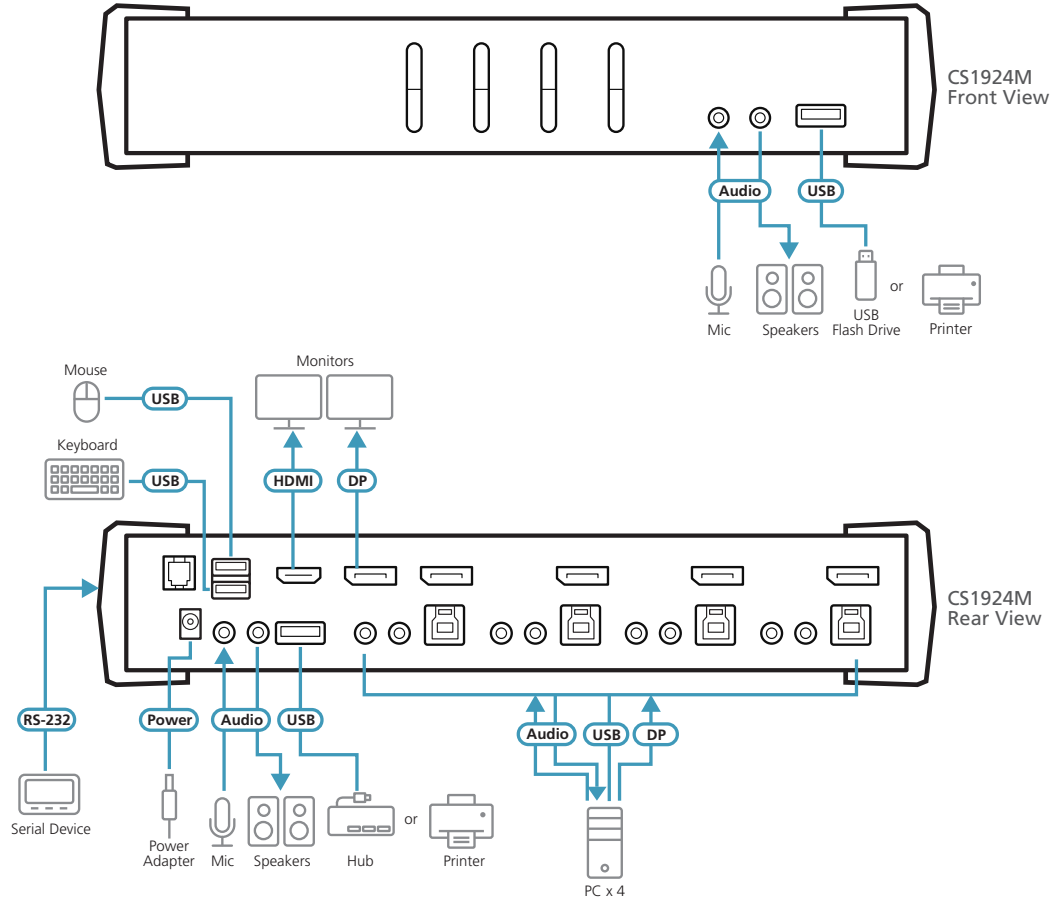

Specifications

	CS1922M	CS1924M
Computer Connections	2	4
Port Selection	Hotkey, Pushbutton, Mouse, RS-232 Commands	
Connectors		
Console Ports	2 x USB Type-A Female 1 x DisplayPort Female (Black) 1 x HDMI Female (Black)1 x HDMI Female (Black) 2 x 3.5mm Audio Jack Female (Green; 1 x front, 1 x rear) 2 x 3.5mm Audio Jack Female (Pink; 1 x front, 1 x rear) 1 x RJ-11 Female	
KVM (Computer) Ports	2 x USB3.1 Gen1 Type-B Female (Blue) 2 x DisplayPort Female (Black) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)	4 x USB3.1 Gen1 Type-B Female (Blue) 4 x DisplayPort Female (Black) 4 x 3.5mm Audio Jack Female (Green) 4 x 3.5mm Audio Jack Female (Pink)
Power	1 x DC Jack	
USB Hub	2 x USB 3.1 Gen1 Type-A Female (Blue; 1 x front panel; 1 x rear panel)	
Switches		
Selected	2 x Pushbutton	4 x Pushbutton
LEDs		
On Line / Selected	2 (Orange)	4 (Orange)
USB Link	2 (Green)	4 (Green)
Emulation		
Keyboard / Mouse	USB	
Video	Up to 4096 x 2160 @ 60Hz, 2560 x 1440 @ 144Hz	
Scan Interval	1-99 seconds (Default: 5 seconds)	
Power Consumption	DC5V:4.09W	DC5V:4.89W
Environmental		
Operating Temperature	0 – 50° C	
Storage Temperature	-20 – 60° C	
Humidity	0 – 80% RH, Non-condensing	
Physical Properties		
Housing	Metal, Plastic	
Weight	0.73 kg	0.92 kg
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm	27.00 x 8.80 x 5.55 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 05/2024 V2.0

© Copyright 2024 ATEN® International Co. Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.
 The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

