


FBWLCUC11

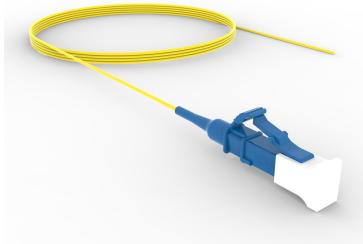

TeraSPEED® LC to Unconnectorized, Fiber Pigtail, 0.9 mm SBJ

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber pigtail, unjacketed
Product Brand	SYSTIMAX InstaPATCH® 360
Ordering Note	Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Blue
Color, connector A	Blue
Interface, Connector A	LC/UPC
Jacket Color	Yellow
Total Fibers, quantity	1

Dimensions

Cable Assembly Length, minimum (ft)	1
Cable Assembly Length, maximum (ft)	23
Cable Assembly Length, minimum (m)	1
Cable Assembly Length, maximum (m)	7

Ordering Tree

FBWLCUC11

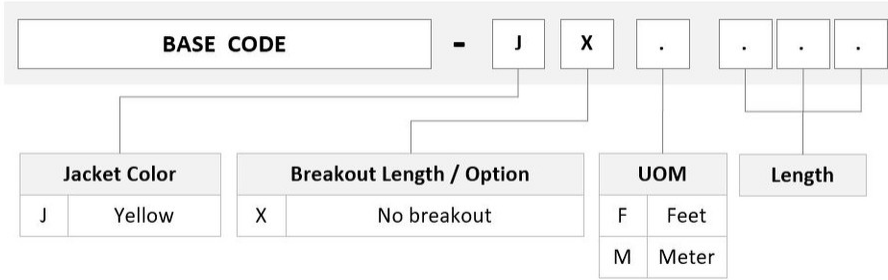

Mechanical Specifications

Cable Retention Strength, maximum 2.00 lb @ 90 ° | 5.00 lb @ 0 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.652.D | G.657.A1, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Packaging quantity	2
---------------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



Included Products

760004564 N-001-RF-8W-F09YL	-	TeraSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered Fiber Cable
860657283	-	LC/UPC Connector, Single-mode, Blue

