

# 1-Local / Remote Shared Access Single Port VGA

## KVM over IP Switch

### CN8000A

The new generation ATEN CN8000A features superior video quality with HD resolutions up to 1920 x 1200 @ 60 Hz LUC (Laptop USB Console) for easier KVM access, user-friendly local console OSD and virtual media function without additional cable.

The CN8000A Single Port KVM over IP provides access control through “over-IP” for conventional KVM switches that do not have built in over-IP functionality. It allows system operators to monitor and access computers from remote locations using standard Web browsers or Windows and Java based application programs. The CN8000A connects to the Intranet either LAN or WAN simply by using an industry standard Cat 5e/6 cable, and is connected to a local KVM switch or server via a custom KVM cable.

The ATEN CN8000A uses the standard TCP / IP protocols for communications, it allows the connected server or KVM switch to be accessed from any computer over the internet – whether that computer is located down the hall, in other areas of the country or branch offices in other parts of the world.

The CN8000A expands on previous models by providing a dedicated RS-232 port for modem access or serial console management, a PON port to connect a ATEN PDU device and USB 2.0 virtual media capability.

A Windows Client and a Java Client are available for remote access. They allow IP connection and login from anywhere over the internet. In addition, ATEN also provides an iOS APP - PadClient, whose intuitive interface makes it easy to connect to the KVM over IP switch and control computers direct from your iPad.

To meet advanced security requirements, the CN8000A's Virtual Media function allows a Smart Card / CAC reader on a user's local system to be mapped to a remote server. The CN8000A provides a fast, reliable and a cost effective way to remotely access and manage widely distributed multiple computer installations.

Front View



Rear View



## Features

### Hardware

- Provides over-IP capability to KVM switches that do not have built in over-IP functionality
- Local console provides PS/2, and USB keyboard and mouse support
- Supports multi-platform server environments: Windows, Mac, Sun, Linux and VT100 based serial devices
- Virtual Media Support
- High video resolution – up to 1920 x 1200 @ 60 Hz- 24 bit color depth for the local console; up to 1920 x 1200 @ 60 Hz with 24 bit color depth for remote sessions
- Enhanced fps (frames per second) throughput for crisp responsive video display

### Management

- Laptop USB Console (LUC) – A dedicated USB port directly connects to laptop for easy console operation
- Easy configuration through local console OSD
- Up to 64 user accounts
- Up to 32 users concurrent logins
- End session feature – administrators can terminate running sessions
- Event logging and Windows-based Log Server support
- Supports instant notification of critical system events via email, SNMP trap, and Syslog
- Remote Firmware upgradable
- Serial console management – serial terminal access. Access the CN8000A via a built-in serial viewer, or via third party software (such as PuTTY) for Telnet and SSH sessions
- PPP mode (modem) dial-in / dial back / dial out support for out-of-band, and low bandwidth operation
- Port Share Mode allows multiple users to gain access to a server simultaneously
- Local / Remote Share Mode to conveniently grant shared or exclusive console privilege
- Integration with ATEN CC2000 Centralized Management Software
- Integration with ATEN CCVSR Video Session Recording Software
- Power Over the NET integration for remote power control
- DDNS (Dynamic Domain Name System)
- Export / import user account and configuration settings
- Enable / disable browser operation
- IPv6 capable

### Easy-to-Use Interface

- Browser-based and AP GUIs offer a unified multi-language interface to minimize user training time and increase productivity
- Multi-platform client support (Windows, Mac OS X, Linux, Sun)
- Multi-browser supports (IE, Chrome, Firefox, Safari, Opera)
- Browser-based UI in pure Web technology allows administrators to perform administrative tasks without pre-installed Java software package required
- Full-screen or sizable and scalable Virtual Remote Desktop
- Magic Panel

### Advanced Security

- Smart Card / CAC Reader Supports
- External authentication supports: RADIUS, LDAP, LDAPS, and MS Active Directory
- TLS 1.2 encryption to protect password when users log in
- Flexible design allows users to choose any combination of encryption algorithms (e.g. 256-bit AES) or system-generated random selection for independent keyboard / mouse, video, and virtual media data encryption
- Supports for IP / MAC Filter
- Supports password protection
- Private CA

## Virtual Media

- Virtual media enables file applications, OS patching, software installation and diagnostic testing
- Works with USB enabled servers in operating system and BIOS level
- Supports USB 2.0 DVD / CD drives, USB mass storage devices, PC hard drives and ISO images
- Convenient to use without virtual media cable


## Virtual Remote Desktop

- Video quality and video tolerance can be adjusted to optimize data transfer speed; monochrome color depth setting, threshold and noise settings for compression of the data bandwidth in low bandwidth situations
- Full screen video display or scalable video display
- Message Board for communication among remote users
- On-screen keyboard with multi-language support
- Mouse Dynasync
- Exit Macros support
- BIOS-level access

## Highlights

<b>Laptop USB Console (LUC)</b>	A dedicated USB port directly connects to your Laptop for easy console operation.
<b>Over-IP Capability for Legacy KVM Switches</b>	Protects your original KVM switch investment. No need to purchase new KVM switches to achieve the benefits of over-IP connectivity.
<b>Multi-Keyboard Language Support — On-Screen Keyboard</b>	The CN8000A supports multiple keyboard language input – including English, French, German, Italian, Spanish, Japanese, Korean, and Traditional Chinese. There is no need to have a separate keyboard for each language – you can input key data in any of these languages with the CN8000A's convenient on-screen keyboard.
<b>External Authentication Supports</b>	In addition to its own security protection, the CN8000A allows you to set up log in authentication and authorization management from external sources such as RADIUS, LDAP, LDAPS, and MS Active Directory.
<b>Ease-to-Use User Interface</b>	A user-friendly, intuitive, GUI provides convenient, access, configuration and operation. Local Console, browser-based and AP GUIs offer a unified multi-language interface to minimize user training time and increase productivity.
<b>Virtual Remote Desktop</b>	The remote desktop can appear full-screen or as a window with a flexible scaling video display. Advanced features such as the Message Board, Mouse DynaSync™, Virtual Media, and Keyboard Pass Through, create a Virtual Remote Desktop that allows users to operate servers from remote locations just as if they were actually at the local site.
<b>Superior Video Resolution</b>	With enhanced fps throughput for crisp responsive video display, the switches offer resolutions of up to 1920 x 1200 @ 60 Hz; vibrant 24-bit color depth for rich remote session display.
<b>Configurable Network Bandwidth Settings</b>	A Network setting is provided that allows you to streamline data throughput by adjusting the size of the data stream (bandwidth) to match network traffic conditions. Video performance can be adjusted so that data throughput is optimized for the available network bandwidth. With high speed LAN access, the network setting can be adjusted so that a greater amount of video information is sent, resulting in a higher quality video display. In a limited bandwidth situation, the network setting can be adjusted so that net lag is minimized.

<b>Mouse DynaSync</b>	Automatically synchronizes the local and remote mouse movements for perfect alignment of mouse pointers, regardless of server mouse acceleration settings.
<b>Message Board</b>	To alleviate the problem of access conflicts arising from multiple logins, the Message Board functions like an Internet chat program, allowing users who are logged in to instantly communicate with each other.
<b>Virtual Media</b>	Virtual Media support lets you map DVD / CD-ROMs and other storage media to a remote server. This function allows you to conduct file transfers, application and OS patches, and diagnostics remotely.
<b>Smart Card Reader</b>	The smart card reader function allows a reader plugged into a local client computer's USB port to be redirected, and appear as if it were plugged into the remote server. One purpose of smart cards (Common Access Cards, for example), is to allow authentication to the remote server from the local client.

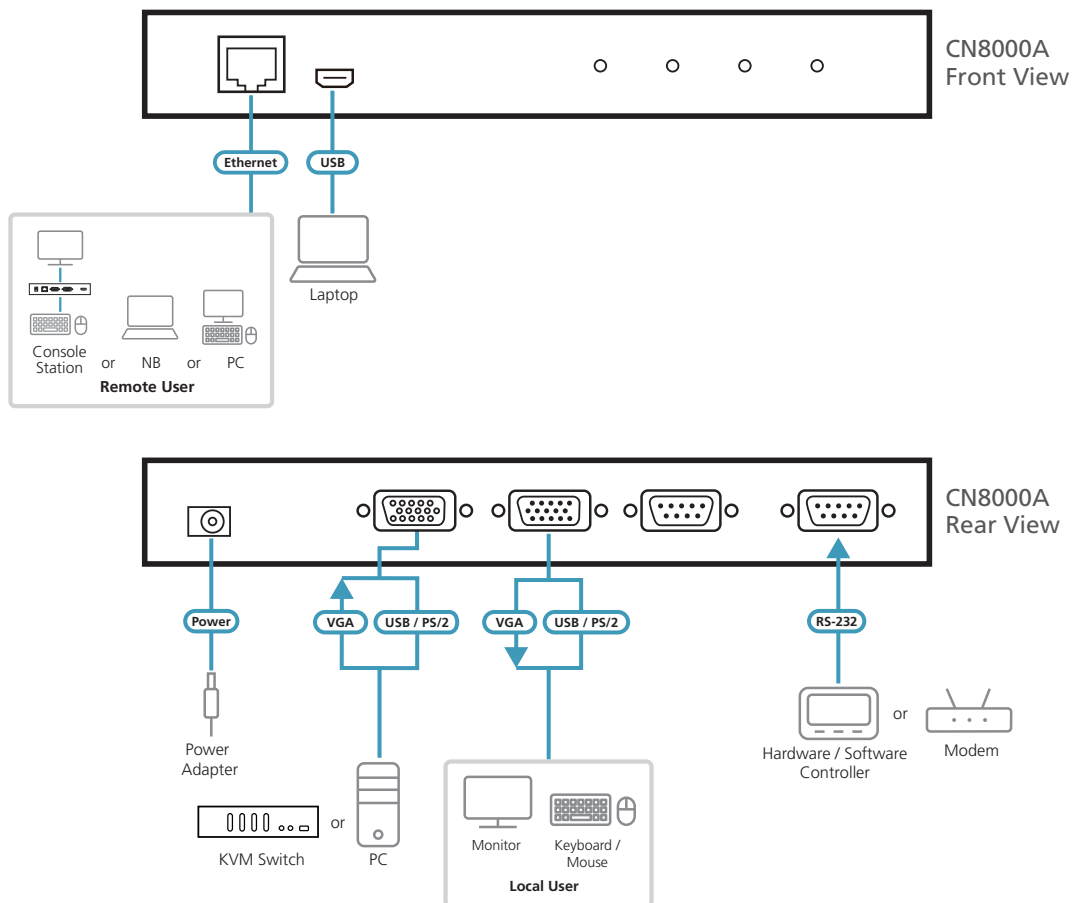

## Specifications

	CN8000A
<b>Connectors</b>	
Console Ports	1 x SPHD Male (Yellow)
KVM (Computer) Ports	1 x SPHD Female (Yellow)
Laptop USB Console (LUC) Port	1 x USB Mini Type-B Female
PON	1 x DB-9 Male
RS-232	1 x DB-9 Male
LAN Ports	1 x RJ-45 Female
Power	1 x DC Jack
<b>Switches</b>	
Reset	1 x Semi-recessed Pushbutton
<b>LEDs</b>	
Power	1 (Orange)
Link	1 (Green)
10 / 100 / 1000 Mbps	1 (Orange / Orange+Green / Green)
<b>Emulation</b>	
Keyboard / Mouse	USB; PS/2
<b>Video</b>	Up to 1920 x 1200 @ 60 Hz; DDC2B
<b>Power Consumption</b>	DC5.3V:4.79W
<b>Environmental</b>	
Operating Temperature	0 – 50 °C (CN8000A) 0 – 40 °C (Power Adapter)
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-condensing
<b>Physical Properties</b>	
Housing	Metal
Weight	0.49 kg
Dimensions (L x W x H)	20.00 x 8.14 x 2.50 cm

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 06/2024 V3.0

© Copyright 2024 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.

