


PoE Industrial Ethernet Switch DIN-Rail Managed

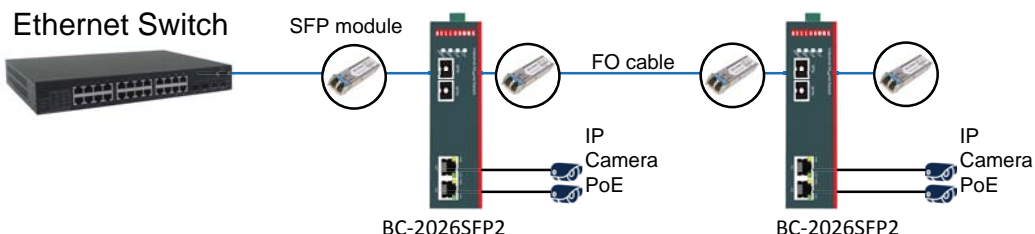

BC-2026SFP2

2-port 10/100Base-T(X) POE to
2-SFP port 100Base-FX

Overview

The BC-2026SFP2 series Industrial POE Switch is the ideal solution for powering remote devices such as IP phones, video cameras, wireless access points, alarms, traffic controllers, sensors and tracking devices, which are installed 100m far from a Power over Ethernet switch. In addition to transmitting data, the twisted-pair port also injects power down the cable, allowing a remote Power over Ethernet Device to operate without the need of any additional power source. All Power over Ethernet Powered Devices (IEEE 802.3af/at compliant) are supported.

The BC-2026SFP2 features 1 or 2x 100Base-FX fiber port and 2 x 10/100Base-TX twisted-pair port. The fiber optic port features SC connector and operating distance from 2km to 120km depending on different Model. The twisted-pair port has 4 x RJ-45 connector with a maximum operating distance of 100m. The BC-2026SFP2-2F provides two SFP slot for any MSA-complaint pluggable 155M SFP transceivers.

The BC-2026SFP2 Industrial Ethernet Switch is designed to stand up to extreme temperature, surges, vibrations, and shocks found in industrial automation, government, military, oil & gas, mining and outdoor applications, such as traffic management, oil and gas pipelines.

The BC-2026SFP2 series enables real-time deterministic network operation, requires no configuration and will instantly operate as soon as you power it up. Additionally, they can be installed by DIN-rail or wall-mounted, allowing users to deploy any mix of network conversions required.

EMS Standards

- IEC61000-4-2(ESD): +8KV (Contact Discharge), +15KV (Contact Discharge)
- IEC61000-4-3(RS): 10V/M (80-1000MHZ)
- IEC61000-4-4(EFT): power cables +4KV, signal cables +2KV
- IEC61000-4-5(Surge): power cables +4KV CM/+ 2KV DM, signal cables + 2KV
- IEC61000-4-6(RF coupling): 3V (10KHZ-150KHZ), 10V (150KHZ-80MHZ)
- IEC61000-4-8(Power Frequency Magnetic Field): 100A/M COUNT 1000A/M 1S TO 3S
- IEC61000-4-12/18(Damped Oscillatory Wave): 2.5KV CM, 1KV DM
- IEC61000-4-10(conducted disturbances): 30A/M
- IEC61000-4-16(common mode): 30V COUNT 300V, 1S
- IEC61000-6-2(Electromagnetic compatibility)
- IEC61850-3(electrical substation)
- IEEE1613 (electric power substations)
- EN50121-4(Rail Traffic)

Ordering information

Model	Descriptions
BC-2026SFP2	2-port 10/100Base-T(X) POE to 2-SFP port 100Base-FX

Features

- 2 x 10/100Base-TX Port to 1 or 2 x 100Base-FX
- IEEE802.3af/at compliant
- 1*9 fixed fiber module or SFP slot optional
- RJ45 support auto MDI/MDI-X function
- Auto-negotiation speed, half/full-duplex
- Store-and-forward
- Max packet size: 2048bytes
- Wide-range redundant power design (12~56VDC)
- Support wide operating temperature (-40 °C ~ +85 °C)
- Power polarity reverse protect
- Overload current resettable fuse present
- IP-40 protection
- Provides EFT protection for Power line
- Support Ethernet ESD protection
- DIN-Rail and Wall-Mounted Installation
- Low power consumption

Technical Specifications

Standards	IEEE802.3 10BaseT, IEEE802.3u 100BaseT(X) IEEE802.3x Flow control and back pressure,
Performance	Processing Type : Store and Forward MAC Table Size: 1024bit Buffer Space: 512Kbit Back bandwidth: 1G Time Delay: < 150µs
Copper Port	Data Rate: 10/100M Connector: RJ45 x 2 Distance: 100m
Fiber Port	Data Rate: 155M Connector: SC as default, FC/ST/SFP optional Distance: MMF=2km; SMF=20/40/80/100/120km Bi-Di=20/40/80/100/120km
LED indicators	PWR1: ON=Power Connected PWR2: ON= Power Connected FL/A: ON=Fiber Connected; Active=Data Transmitting TL/A: ON=Copper Connected; Active= Data Transmitting POE: ON=Power Working; Off=No Power
Power	Input Voltage: 12~56 VDC, redundant power inputs Power Consumption: <5W (POE excluded) Protection: Overload Current; Reverse Polarity Connector: Terminal Block
Environment	Operating Temperature: -40 °C ~ +85 °C Storage Temperature: -40 °C ~ +95 °C Relative humidity: 5-95% (no condensation)
Physical Characteristics	Housing: IP40 Protection, Aluminum Alloy Installation: DIN-Rail , Wall-Mounted Dimension: 138*107*45mm Weight: 0.50kg